

XT series General Purpose VRLA batteries are designed with AGM(Absorbent Glass Mat) technology. XT series offers 5 years($\leq 20Ah$) and 10 years($\geq 20Ah$) full maintenance free design life. With a compact design and good reliability, this series is highly suited for security and alarm systems, UPS systems, emergency light systems and other small backup applications.

6V Voltage	1.3Ah Capacity	AGM Technolog	General Purpose
---------------	-------------------	------------------	--------------------



Complied standards

- IEC 60896-21/22
- JIS C8704
- GB/T19639

Features and Benefits

- Wide operating temperature range from -15°C to 50°C
- Can be used at vertical or horizontal orientation
- Balanced design for both floating and cyclic operation
- Maintenance-free operation
- Low self-discharge rate and long shelf life


Applications

- Alarm systems
- Communication Equipments
- Control equipments
- Security systems
- Medica Equipments
- UPS systems
- Power tools
- Toys
- Emergency Power Systems
- Photovoltaic Systems
- Security Systems







Technical Specifications

Nominal Voltage.....	6V (3 cells per unit)
Nominal Capacity(20°C)	
20hour rate(0.065A,5.4V).....	1.3Ah
10hour rate(0.12A,5.4V).....	1.2Ah
5hour rate(0.23A,5.25V).....	1.15Ah
1hour rate(0.87A,4.8V).....	0.87Ah
Dimension(mm).....	L97 x W24 x H52 x TH58mm
Approx. Weight	0.30kg
Terminal Type.....	F1
Internal Resistance.....	36mΩ(fully Charged @20°C)
Max.Charge Current.....	0.39A
Max.Discharge Current (5s).....	19.5A
Ambient Temperature	
Discharge.....	-15-45°C
Charge.....	-15-45°C
Storage.....	-15-45°C
Capacity Affected by Temp.(10 hr capacity)	
105% @40°C	
100% @25°C	
85% @0°C	
65% @-15°C	
Self-Discharge @20°C.....	Approx. 3% per month
Charge Voltage @20~25°C	
Float charge voltage.....	6.8V-6.9V
Equalize Charge Voltage.....	7.2V-7.5V

Dimensions

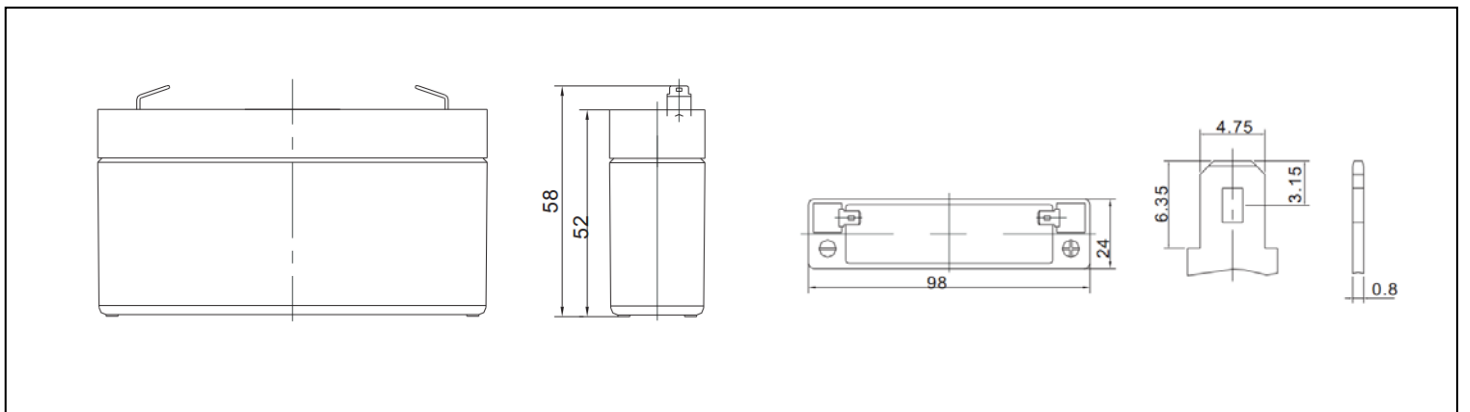

Performance Characteristics

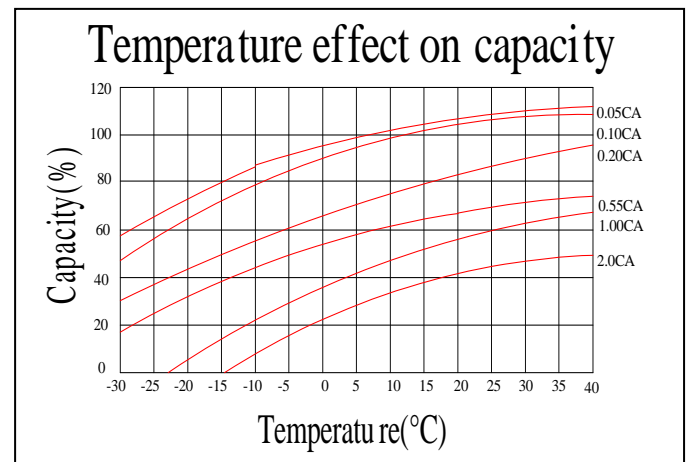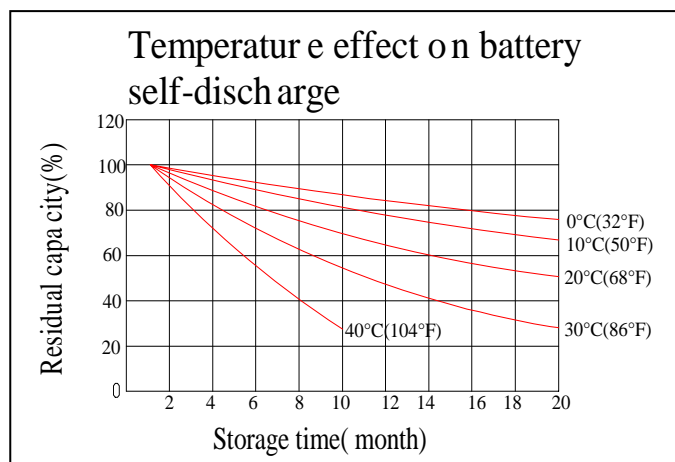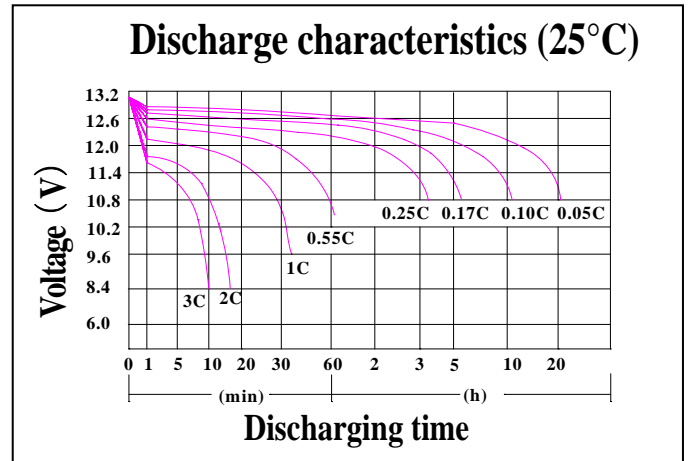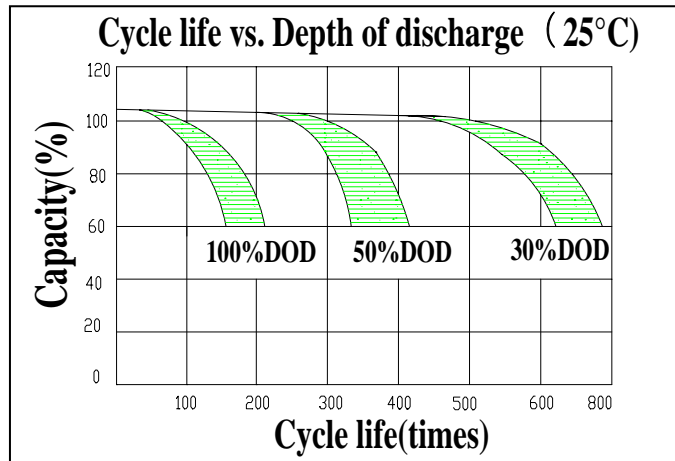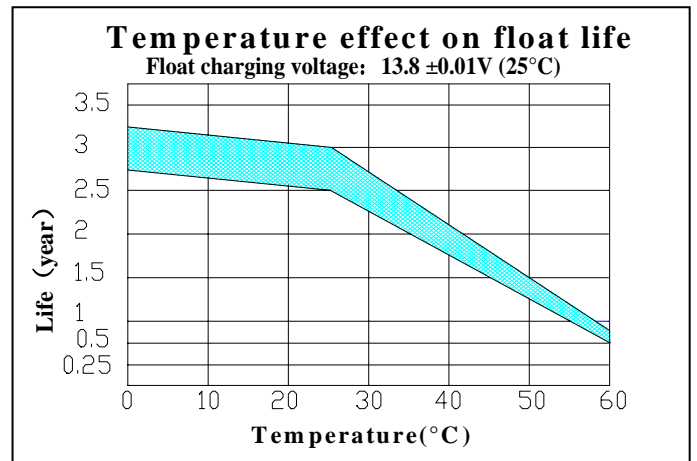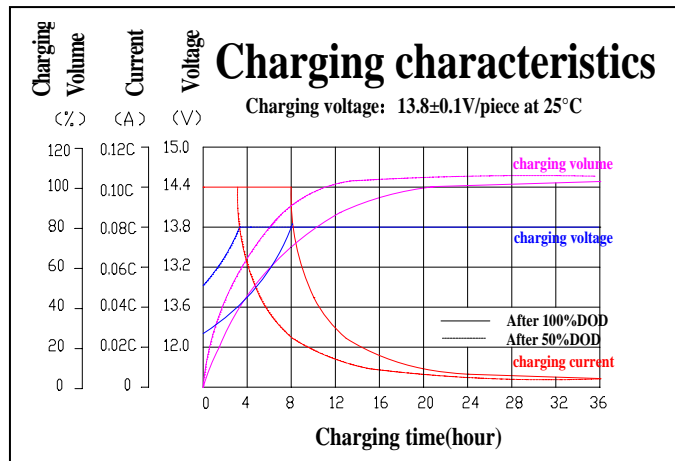

Battery Discharge

Discharge Constant Current per Cell (Amperes at 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	4.43	2.86	2.15	1.43	1.00	0.87	0.54	0.37	0.25	0.16	0.14	0.07
1.65V	4.35	2.81	2.11	1.40	0.98	0.85	0.53	0.36	0.24	0.16	0.13	0.07
1.70V	4.27	2.76	2.07	1.38	0.96	0.83	0.52	0.35	0.24	0.16	0.13	0.07
1.75V	4.19	2.70	2.03	1.35	0.95	0.82	0.51	0.35	0.23	0.16	0.13	0.07
1.80V	4.03	2.60	1.96	1.30	0.91	0.79	0.49	0.33	0.22	0.15	0.12	0.065

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	8.53	5.51	4.14	2.75	1.93	1.67	1.03	0.71	0.47	0.32	0.26	0.14
1.65V	8.38	5.41	4.07	2.70	1.89	1.64	1.01	0.69	0.46	0.31	0.26	0.14
1.70V	8.22	5.31	3.99	2.65	1.86	1.60	0.99	0.68	0.45	0.31	0.25	0.13
1.75V	8.07	5.21	3.92	2.60	1.82	1.57	0.98	0.67	0.45	0.30	0.25	0.13
1.80V	7.76	5.01	3.77	2.50	1.75	1.51	0.94	0.64	0.43	0.29	0.24	0.13

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

Battery Construction

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	ABS (UL94-V0 optional)	Flame Si-Rubber and aging resistance	Copper No.187	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid	Two layers epoxy resin seal